




1. Close trailer/container doors and put locking hasp in closed position.
2. **SECURE KEEPER BARS FIRST** -- thread one free cable and make a single loop around the keeper bars.
  - Pass the cable through the lock body until it exits the lock body
  - NOTE: Locks are directional. Cable to the Left will lock through Bottom Left of Lock 1
  - Pull the cable tight to remove all slack

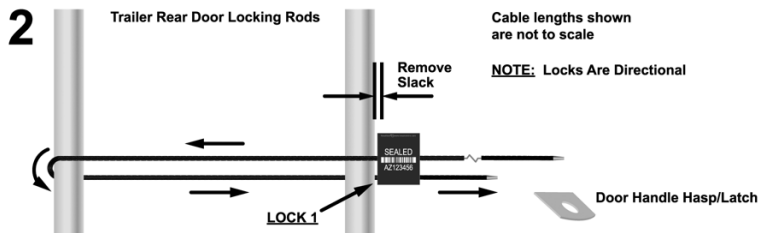

3. **SECURE HASP** -- Thread the other cable end through the hasp and loop back to the lock body.
  - Pass the cable through the open hole in lock body until it exits the lock body
  - Pull the cable tight to remove all slack on the hasp side

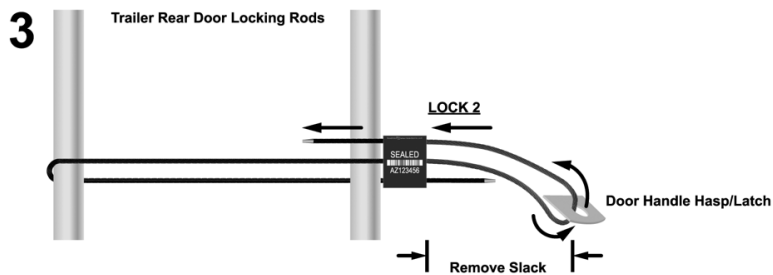

4. **REMOVE EXCESS CABLE** -- For added security, after removing all slack from the loops and lock assembly, cut off any excess cable as close as possible to the lock.

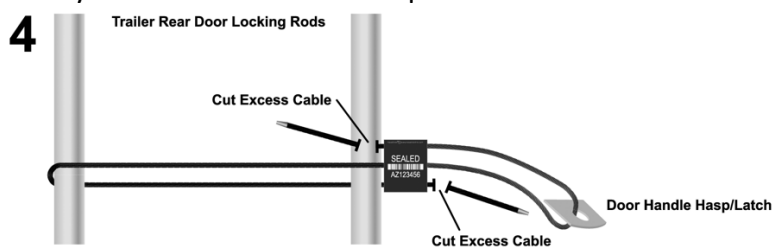

5. **REMOVE CABLE** -- At destination, to remove cable, cut here with cable cutter.

